


POS PRINTER

AMS-LP212A

Features:

- High speed printing
- Automatically label peeling off mechanism
- Super paper roll re-winder
- Auto paper calibration system
- Wide range 35~60 mm paper width
- Accurate buzzer and indicators alarming

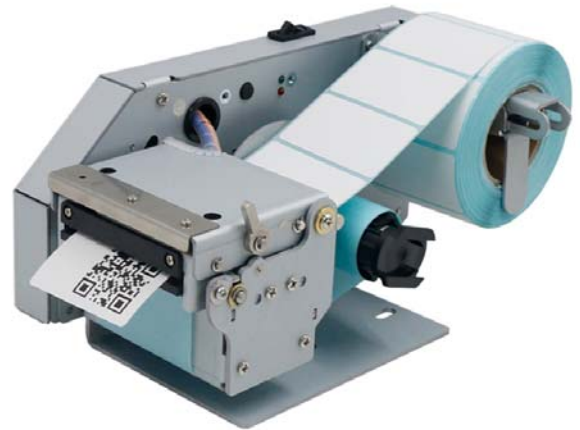

Specification:

Model	AMS-LP212A	
print	Printing method	Dot line thermal printing
	Total dots per line	448 dots
	Printing width	56mm(max)
Detection	Thermal head temperature	Thermal sensors
	Platen open	Mechanical switch
	Paper gap	Reflective infrared light sensor
	Cover open	Mechanical photoelectric sensor
	Out of Paper detection	Reflective infrared light sensor
Power	Working voltage	24±10%V/2A
	Power standby	About 17mA
Paper	Paper width	35~60mm
	Paper roll inner core	≥25mm
	Paper roll outer diameter	120mm(max)
environment	Operation temperature	-10~50°C (no condensation)
	Operation humidity	20~85%RH (40°C/85%RH)
	Storage temperature	-20~70°C (no condensation)
	Storage humidity	10~90%RH (50°C/90%RH)
Service life	Activation pulse resistance	100,000000
	Abrasion resistance	100KM
Dimension	217.5mm*112mm*106.5mm	
Mass	About 1.7kg	
Communication interface	RS232 & USB	