



① **GENERALNO - SVE OPCIJE (WIEGAND PODESIV); A=ULAZAK; B=IZLAZAK**

SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 1 x 7 x 0.34mm² za RFID Čitač A "wiegand"
 LiYCY: 1 x 7 x 0.34mm² za barcode skener A & RFID Čitač "wiegand"
 LiYCY: 1 x 7 x 0.34mm² za RFID Čitač B "wiegand"
 LiYCY: 1 x 7 x 0.34mm² za barcode skener A & RFID Čitač "wiegand"
 LiHCH: 1 x 4 x 0.50mm² za open A / open B (ACC.)
 LiHCH: 1 x 3 x 0.50mm² za TASTER open A i B Smer (CC)
 LiHCH: 1 x 3 x 0.50mm² za brojače A i B

1 x UTP/SFTP (Ako ACC. ide u prepreku, ako ne + LiHCH: 1 x 4 x 0.50mm²)
 1 x UTP/SFTP (Rezerva)

② **STANDARD (verzija 1) - BARCODE KARTA & RFID KARTICA (A) / TASTER (B)**

SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 1 x 5 x 0.34mm²
 LiHCH: 1 x 2 x 0.50mm² za EXIT TASTER (na barijeri do RO, ako ACC. ide u RO)
 - Ako ACC. ide u barijeru, LiHCH: 1 x 2 x 0.50mm² nije potreban
 1 x UTP/SFTP (Rezerva)

③ **STANDARD (verzija 2) - BARCODE KARTA (A) / TASTER (B)**

SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 3 x 5 x 0.34mm²
 LiHCH: 1 x 2 x 0.50mm² za EXIT TASTER (na barijeri do RO, ako ACC. ide u RO)
 - Ako ACC. ide u barijeru, LiHCH: 1 x 2 x 0.50mm² nije potreban
 1 x UTP/SFTP (Rezerva)

④ **STANDARD (verzija 3) - RFID (A) / RFID (B)**

SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 2 x 5 x 0.34mm²
 1 x UTP/SFTP (Rezerva)

⑤ **STANDARD (verzija 4) - AUTORIZOVAN RFID (A) / SLOBODAN (B)**

SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 1 x 5 x 0.34mm²
 - Za neke tipove barijera potreban LiHCH: 3 x 5 x 0.50mm² za EXIT FOTO-ČELIJU (B)
 1 x UTP/SFTP (Rezerva)

⑥ 1 x UTP/SFTP

⑦ **STANDARD (verzija 5) - AUTORIZOVAN RFID & BCS (A) / SLOBODAN (B)**


SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 1 x 5 x 0.34mm²
 - Za neke tipove barijera potreban LiHCH: 3 x 5 x 0.50mm² za EXIT FOTO-ČELIJU (B)
 1 x UTP/SFTP (Rezerva)

⑧ **KOMANDNA KONZOLA**

LiHCH: 1 x 3 x 0.50mm² (za jedan prolaz)
 1 x UTP/SFTP (Rezerva)

GENERALNO - SVE OPCIJE (WIEGAND FIKSNI); A=ULAZAK; B=IZLAZAK

SiSi-J: 1 x 3 x 1.50mm²
 LiYCY: 1 x 5 x 0.34mm² za RFID Čitač A "wiegand"
 LiYCY: 1 x 5 x 0.34mm² za barcode skener A & RFID Čitač "wiegand"
 LiYCY: 1 x 5 x 0.34mm² za RFID Čitač B "wiegand"
 LiYCY: 1 x 5 x 0.34mm² za barcode skener A & RFID Čitač "wiegand"

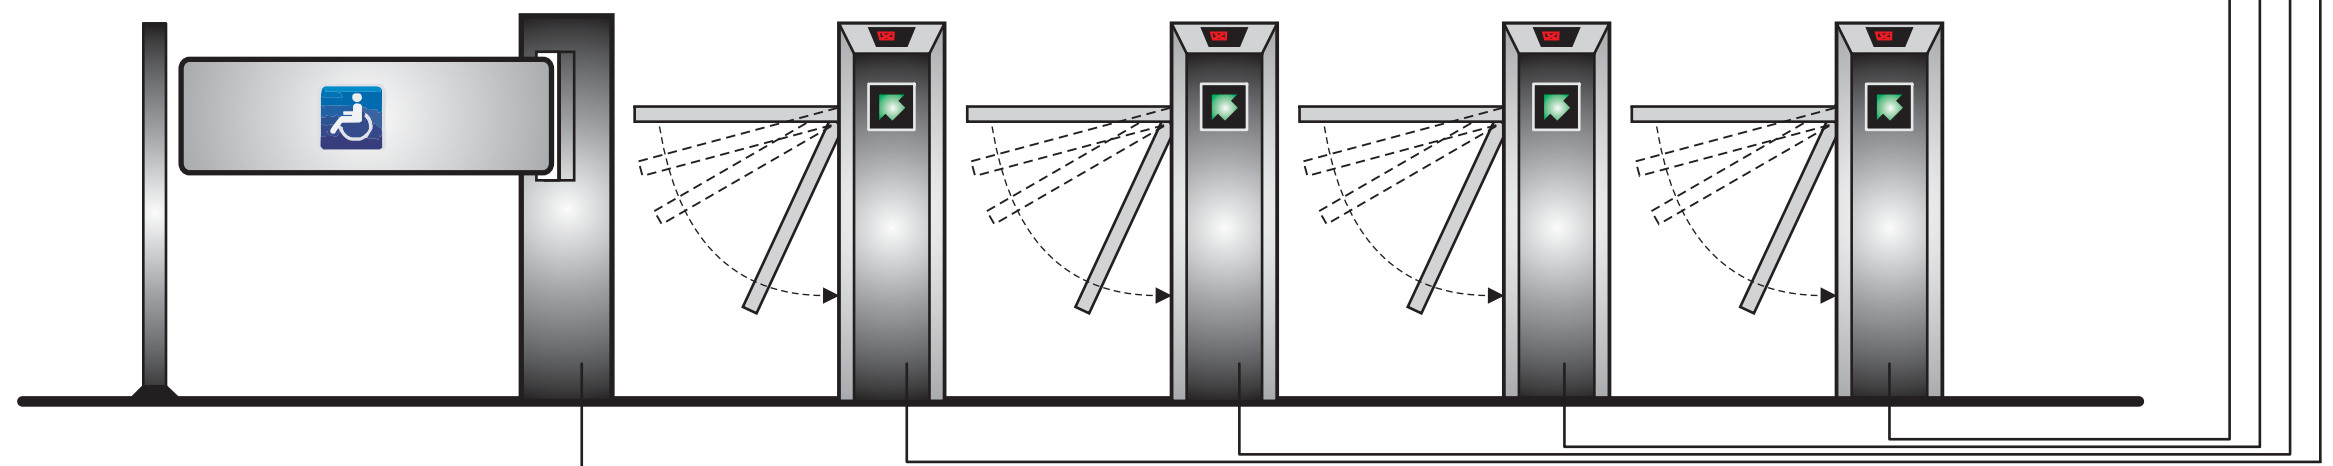

PROLAZ ZA OSOBE SA POSEBNIM POTREBAMA



STANDARDAN PROLAZ

