



Datum (Date): 08/06/2004




PROIZVOD: RFID ČITAČ – TCP/IP PLATFORMA


PART NO: ASA1201

KATEGORIJA: SISTEMI SA KOMPLETNIM OŽIČENJEM

EFIKASNO & EKONOMIČNO REŠENJE ZA HOTELE, APARTMANSKE KOMPLEKSE, OFISE ITD.

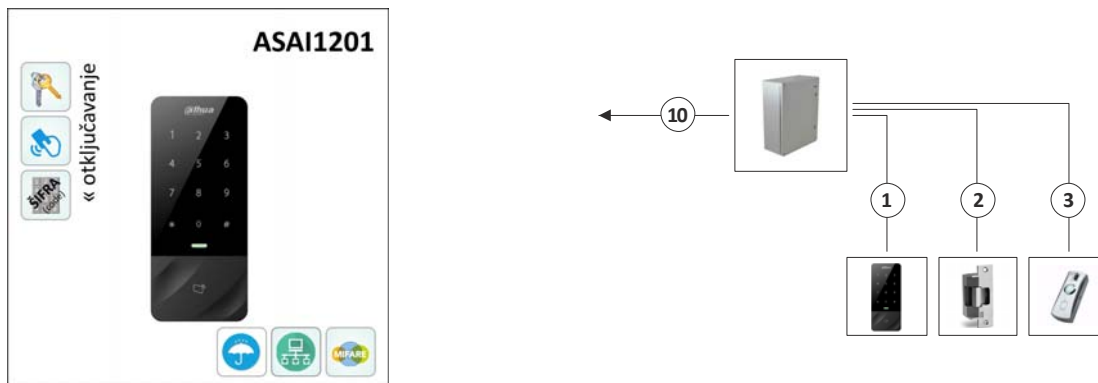

GENERALNI KONCEPT REŠENJA, PRIMER: HOTELSKI SISTEM

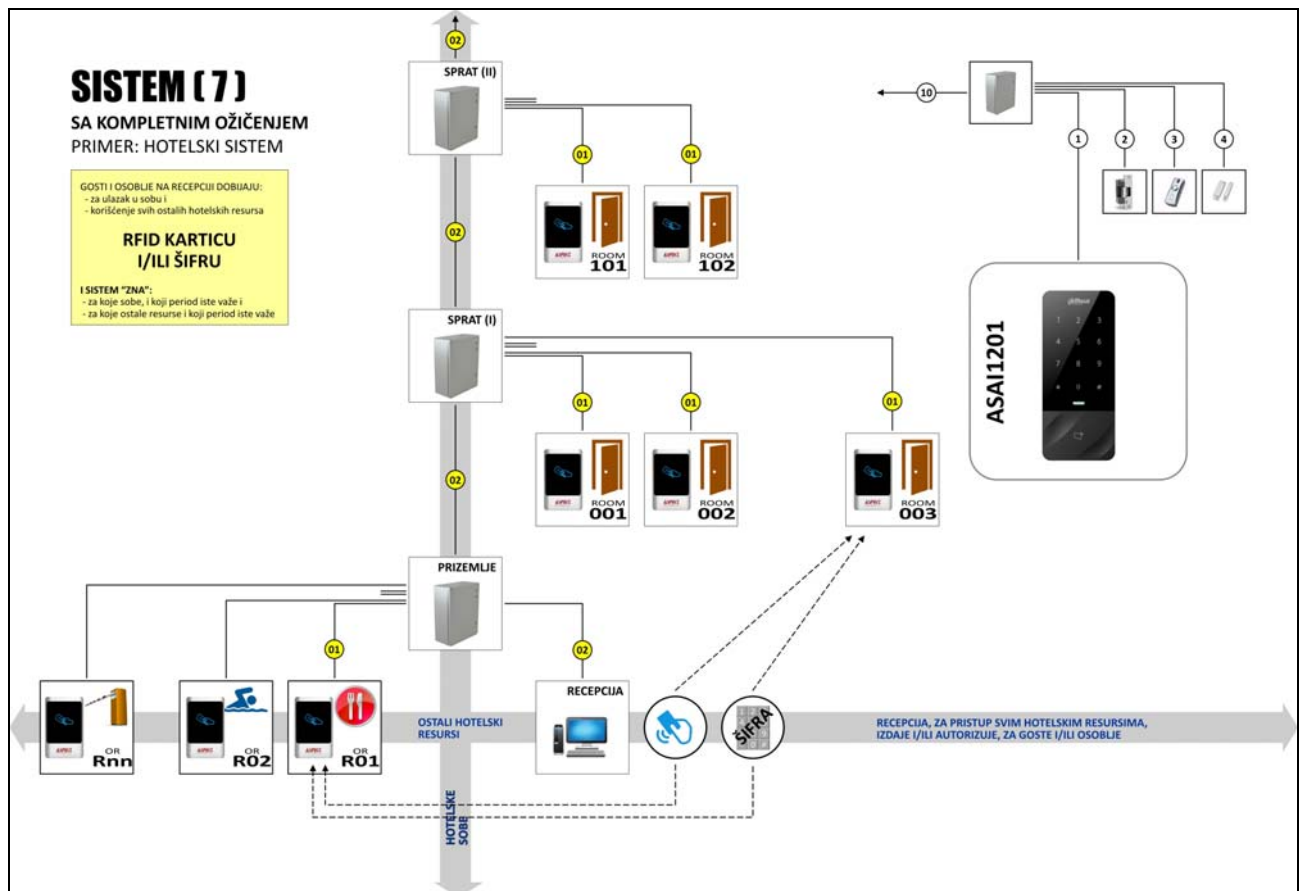

Detaljna tehnička specifikacija proizvoda: www.aspekt.rs


U ORIGINALU

ASI1201E/ASI1201E-D



ASI1201E/ASI1201E-D

Water-proof RFID Standalone

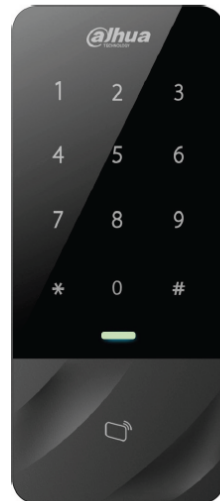

Features

- Support 30,000 valid cards & 150,000 records
- Support multiple cards(default IC card) ("-D" means ID EM card)
- Support card, password and combination
- TCP/IP to PC
- Wiegand or RS-485 interface to reader
- Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- Anti-passback, multi-card open
- Water-proof design
- Support 128 efficient time and holiday schedules
- Watch dog function ensure device free from halting



Technical Specification

System	
Main Processor	32 Bit
Memory	16M
Input/Output Ports	
Input	Door sensor x 1, Exit button x 1
Output	Relay x 1 (Door lock,)
Reader	Reader x 1
Card Read	
Read Format	13.56MHz(Mifare)/125KHz("-D" EM, Optional)
Read Range	3-6cm (max.)
Response Time	<0.1s
Capacity	
Cardholders	30,000
Events	150,000
Function	
User Management	General, VIP, Guest, Patrol, Black list, Duress
Alarm Function	Door time out alarm, Intrusion alarm, Duress alarm, Tamper alarm
Period Setting	Support 128 groups of schedule, 128 groups of periods and 128 groups of holiday periods

Interface

To PC	RI45(10/100M)
To Reader	Wiegand/ RS485


General

RTC	Yes
Voice Prompt	No
Beep Tone	Buzzer
Keyboard	Sensitive touch keypad with blue backlight
Power Supply	9-15DC/200mA
Working Environment	-30°C~+60°C
Working Humidity	≤95%
Dimension(WxDxH)	62*23*142mm
Weight	0.5kg

www.dahuasecurity.com


ASI1201E/ASI1201E-D

Dimensions

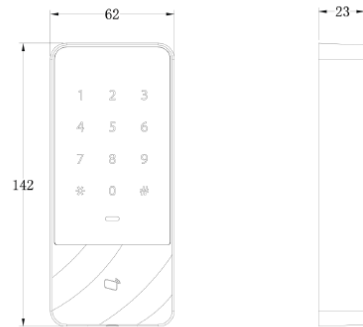

Application

Small Office
One door controller

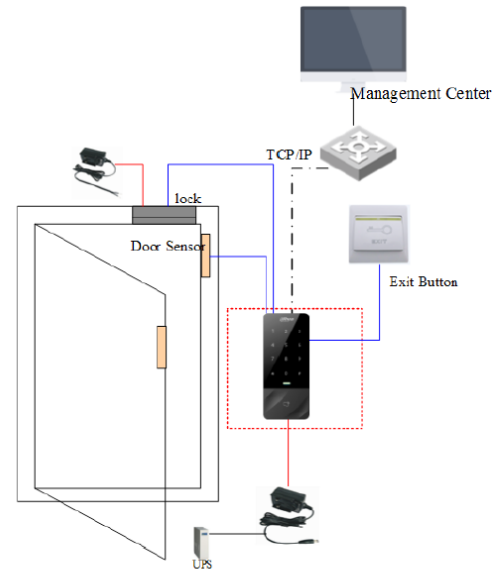

KRAJ